



Residential

Boosts Voice & 4G LTE

Multiple Users

All Carriers

Auto Gain Control

FLARE™

Home/Office Voice & 4G Data Cellular Booster

SureCall Flare Five-band Home Cellular Signal Booster

Overview

The SureCall Flare is an all-carrier voice and 4G LTE signal booster that provides a simplified setup by combining the booster and indoor antenna into an attractively designed tabletop unit. Signal is delivered to the Flare booster using the provided omni directional outdoor antenna and a single connecting low-loss cable. SureCall's award-winning, patented all-carrier booster then delivers enhanced signal coverage to all mobile devices within range, up to 2500 sq. ft., for clearer and more reliable voice and data performance.


Features and Benefits

- Simplified setup that features a combined booster and indoor antenna
- Boosts voice and 4G LTE signal for all mobile devices
- Provides improved coverage up to 2500 sq. ft.
- Supports multiple users simultaneously
- Backed by industry leading 3 year manufacturer's warranty

Booster Kit Includes:

The Flare Kit (SC-Poly-DT-O-Kit) includes: the Flare booster with built-in indoor antenna, power supply, coax cable and outdoor omni antenna.

Installation Example

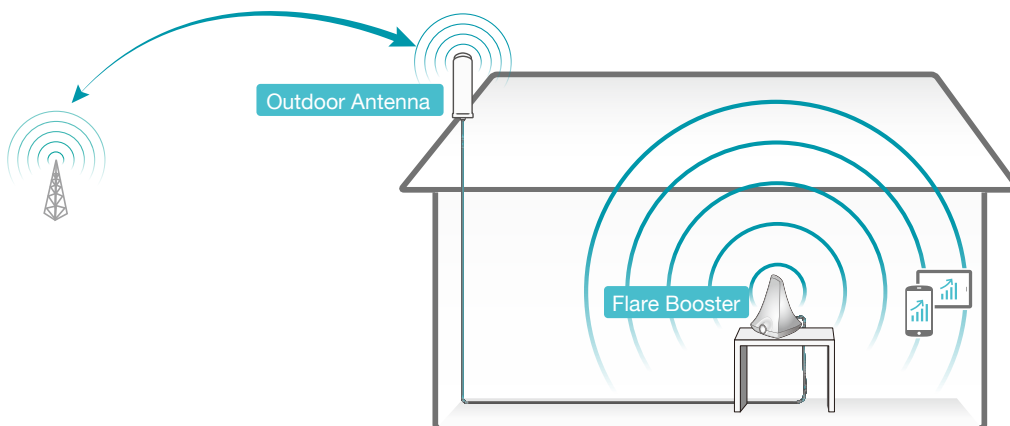

The SureCall Flare signal booster

SPECIFICATIONS

| | |
|-------------------------|---|
| Uplink Frequencies: | 698-716 / 776-787 / 824-849 / 1710-1755 / 1850-1915 (MHz) |
| Downlink Frequencies: | 728-746 / 746-757 / 869-894 / 1930-1995 / 2110-2155 (MHz) |
| Max Gain: | 72 dB 65.5 dB (Canada) |
| Input/Output Impedance: | 75 / 50 Ω |
| Cable: | RG6 (50 ft.) |
| RF Connectors: | F Female |
| FCC ID / IC: | RSNDT / 7784A-DT |

► Patent No. US 8,867,572 B1; US 9,100,839 B2

